
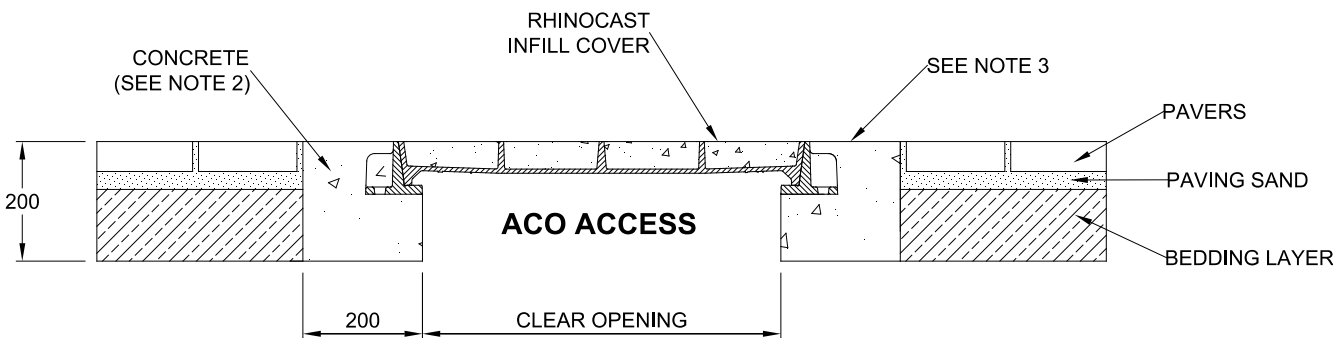


ACO ACCESS		INSTALLATION DRAWING	
DRWG#	XA1R-DP2	RhinoCast Infill Cover Class D240: Pavers 2	
www.acoaus.com.au			



CONCRETE (SEE NOTE 2)

RHINOCAST INFILL COVER

SEE NOTE 3

PAVERS

PAVING SAND

BEDDING LAYER

200

200

CLEAR OPENING

ACO ACCESS

NOTES:

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 32MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the concrete surround must be flush with the top of the frame.
4. Refer to ACO's latest installation instructions for complete details.

ACO ACCESS		SPECIFICATION CLAUSE	ACO Pty Ltd 134-140 Old Bathurst Road Emu Plains NSW 2750 Tel: 1300 765 226 Tel: +61 2 4747 4060 e: technical@acoaus.com.au
DRWG#	XA1R-DP2	RhinoCast Infill Cover	
www.acoaus.com.au			
<p>Access covers & frames are to be ACO Access RhinoCast Infill manufactured from ductile iron with minimum tensile strength of 600MPa and minimum elongation of 10% to conform to AS 3996. The cover systems shall satisfy AS 3996 Load Class D 240kN.</p> <p>Standard Locking bolts (SL) / security rated Security Bolts (SB)* shall be used to secure the Cover** Concrete infill covers to be filled in accordance with AS 3996**</p> <p>* Please delete where appropriate. ** Option</p>			