


<b>ACO ACCESS</b>	<b>INSTALLATION DRAWING</b>	
DRWG# XA1S-DC www.acoaus.com.au	<b>Rhinocast Solid Top Cover Class D240: Concrete</b>	

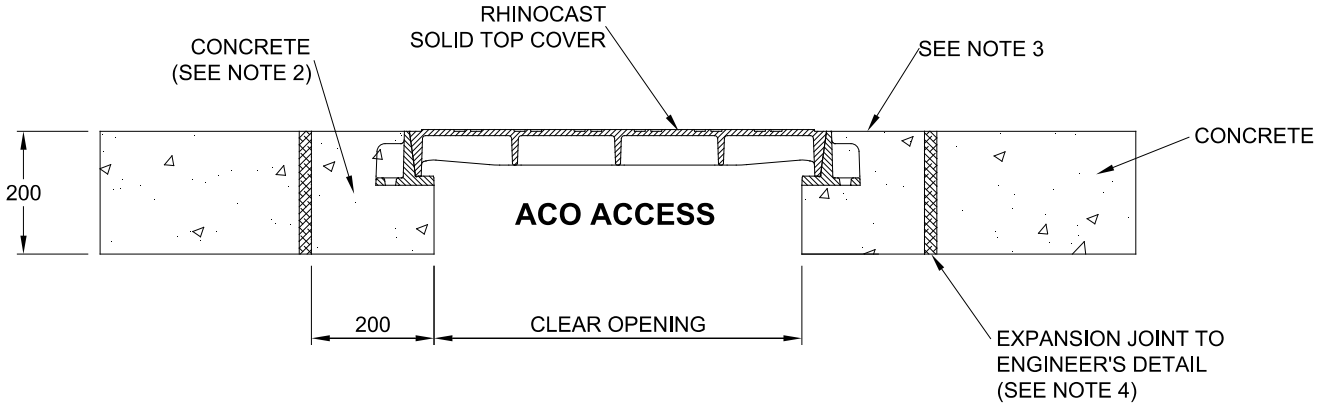

**NOTES:**

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 32MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the concrete surround must be flush with the top of the frame.
4. Expansion and crack control joints are recommended to protect the pit and the concrete surround. *Engineering advice may be required.*
5. Refer to ACO's latest installation instructions for complete details.

<b>ACO ACCESS</b>	<b>SPECIFICATION CLAUSE</b>	ACO Pty Ltd 134-140 Old Bathurst Road Emu Plains NSW 2750 Tel: 1300 765 226 Tel: +61 2 4747 4000 e: technical@acoaus.com.au
DRWG# XA1S-DC www.acoaus.com.au	<b>Rhinocast Solid Top Cover</b>	

Access covers & frames are to be ACO Access Rhinocast Solid Tops manufactured from ductile iron with minimum tensile strength of 600MPa and minimum elongation of 10% to conform to AS 3996. The cover systems shall satisfy AS 3996 Load Class D 240kN.

Standard Locking bolts (SL) / security rated Security Bolts (SB)\* shall be used to secure the Cover\*\*

\* Please delete where appropriate.

\*\* Option