

**ACO ACCESS**

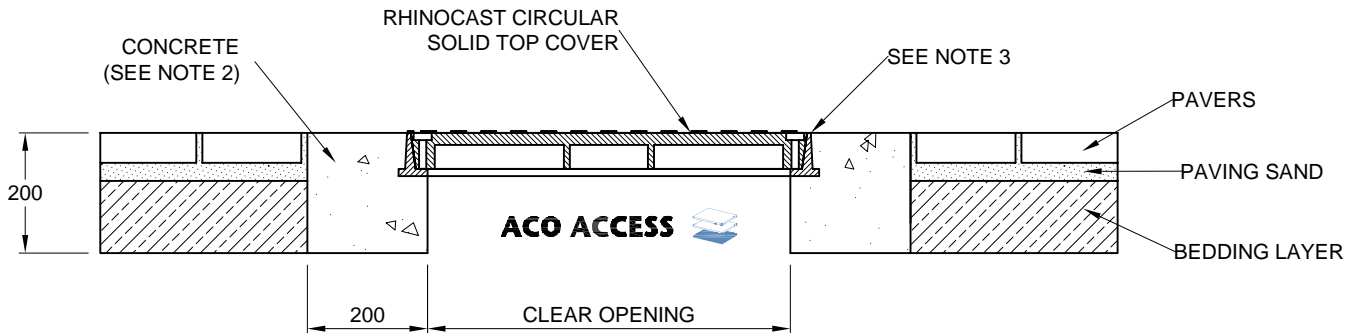
# INSTALLATION DRAWING



DRWG# XACS-CDP2

## Rhinocast Circular Solid Top Cover

www.acoaus.com.au

**Class C-D: Pavers 2****NOTES:**

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the concrete surround must be flush with the top of the frame.
4. Refer to ACO's latest installation instructions for complete details.

**ACO ACCESS**

# SPECIFICATION CLAUSE

ACO Polycrete Pty Ltd  
 134-140 Old Bathurst Road  
 Emu Plains NSW 2750  
 Tel: +61 2 4747 4000  
 Fax: +61 2 4747 4060  
 e: technical@acoaus.com.au

DRWG# XACS-CDP2

## Rhinocast Circular Solid Top Cover

www.acoaus.com.au

All access covers & frames are to be ACO Access Rhinocast (StandardsMark licence no. 2646) manufactured from minimum grade 600-3 - Spheroidal Ductile cast iron to conform to AS 1831, frames manufactured from minimum grade T220 Grey cast iron to conform to AS 1830. The cover systems shall satisfy AS 3996 Load Class D 210kN. For sizes, part nos. & configurations refer to Drawing No. \_\_\_\_\_\*

Standard/ Barri Bolts\* shall be used to secure the Cover\*\*

\* Please delete or complete where appropriate.

\*\* Option