




DRWG# XATR-ABT  
www.acoaus.com.au

**Rhinocast Trench Run Recessed Covers**  
**Class A-B: Tiles, with 12mm Decorative Edge**

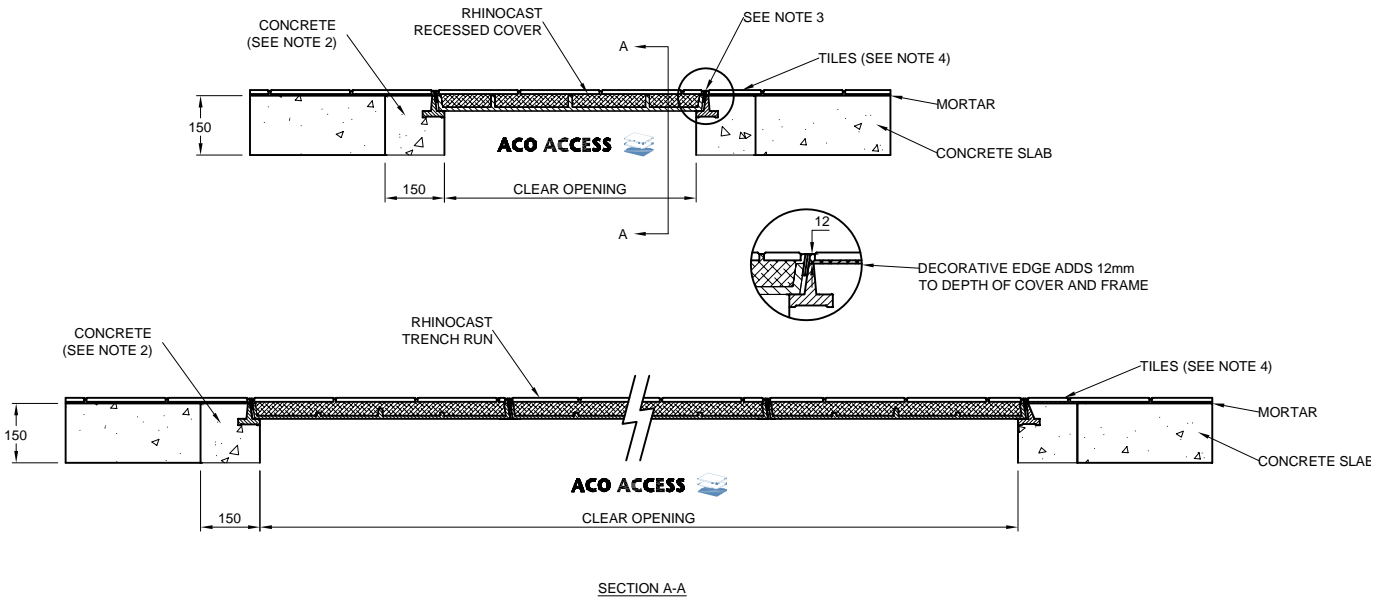

**NOTES:**

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the tiles must be flush with the top of the decorative edge.
4. The tile course adjacent to the decorative edge must be fully bonded to the concrete surround.
5. Refer to ACO's latest installation instructions for complete details.



ACO Polycrete Pty Ltd  
134-140 Old Bathurst Road  
Emu Plains NSW 2750  
Tel: +61 2 4747 4000  
Fax: +61 2 4747 4060  
e: technical@acoaus.com.au

DRWG# XATR-ABT  
www.acoaus.com.au

**Rhinocast Recessed Cover**  
**With 12mm Decorative Edge**

All access covers & frames are to be ACO Access Rhinocast (StandardsMark licence no. 2646) manufactured from minimum grade 600-3 - Spheroidal Ductile cast iron to conform to AS 1831, frames manufactured from minimum grade T220 Grey cast iron to conform to AS 1830. The cover systems shall satisfy AS 3996 Load Class B 80kN. For sizes, part nos. & configurations refer to Drawing No. \_\_\_\_\_\*

A 12mm decorative brass/stainless steel\* edge is fixed to the cover  
Standard/ Barri Bolts\* shall be used to secure the Cover\*\*  
Concrete infill covers to be filled in accordance with AS 3996\*\*

\* Please delete or complete where appropriate.

\*\* Omit